



Economical

- Maximum efficiency of 98.3 %
- Shade management with OptiTrac Global Peak
- Active temperature management with OptiCool

Flexible

- DC input voltage of up to 1,000 V
- Integrated grid management functions
- Reactive power supply
- Module-tailored system design with Optiflex

Communicative

- SMA Webconnect
- Sunny Portal communication
- SMA and SunSpec Modbus communication
- Simple country configuration
- Multifunction relay comes standard

Easy-to-Use

- Three-phase feed-in
- Cable connection without tools
- SUNCLIX DC plug-in system
- Integrated ESS (Electronic Solar Switch)
- Easy wall mounting

SUNNY TRIPOWER 5000TL – 12000TL

The Three-Phase Inverter – Not Only for Your Home...

...but also perfectly suited to the design of the traditional residential PV system up to the higher power outage range. After all, with the addition of the new 10 kVA and 12 kVA versions to the portfolio, the Sunny Tripower product range covers a broad spectrum of applications. Users benefit from numerous tried-and-tested product features. Highly flexible with its proven Optiflex technology and asymmetrical multistring, it delivers maximum yields with a top efficiency rating and OptiTrac Global Peak. In addition to SMA and SunSpec Modbus communication, it also comes standard with a direct Sunny Portal connection via SMA Webconnect. Other standard features include integrated grid management functions, reactive power supply and suitability for operation with a 30 mA RCD. In summary, when it comes to system design in the 5 kW to 12 kW power classes, the Sunny Tripower is the optimum product solution – for applications ranging from use in your own home and larger PV rooftop systems to implementation of smaller-scale PV farms.


SUNNY TRIPOWER

5000TL / 6000TL / 7000TL / 8000TL / 9000TL / 10000TL / 12000TL

Technical Data	Sunny Tripower 5000TL	Sunny Tripower 6000TL
Input (DC)		
Max. generator power	9000 W _p	9000 W _p
Max. input voltage	1000 V	1000 V
MPP voltage range / rated input voltage	245 V to 800 V/580 V	295 V to 800 V/580 V
Min. input voltage / start input voltage	150 V / 188 V	150 V / 188 V
Max. input current input A / input B	11 A / 10 A	11 A / 10 A
Max. short-circuit current input A / input B	17 A / 15 A	17 A / 15 A
Number of independent MPP inputs / strings per MPP input	2 / A:2; B:2	2 / A:2; B:2
Output (AC)		
Rated power (at 230 V, 50 Hz)	5000 W	6000 W
Max. AC apparent power	5000 VA	6000 VA
Nominal AC voltage	3 / N / PE; 220 / 380 V 3 / N / PE; 230 / 400 V 3 / N / PE; 240 / 415 V	3 / N / PE; 220 / 380 V 3 / N / PE; 230 / 400 V 3 / N / PE; 240 / 415 V
Nominal AC voltage range	160 to 280 V	160 V to 280 V
AC grid frequency / range	50 Hz, 60 Hz / -5 Hz to +5 Hz	50 Hz, 60 Hz / -5 Hz to +5 Hz
Rated power frequency / rated grid voltage	50 Hz / 230 V	50 Hz / 230 V
Max. output current	7.3 A	8.7 A
Power factor at rated power	1	1
Adjustable displacement power factor	0.8 overexcited to 0.8 underexcited	0.8 overexcited to 0.8 underexcited
Feed-in phases / connection phases	3 / 3	3 / 3
Efficiency		
Max. efficiency / European efficiency	98 % / 97.1 %	98 % / 97.4 %
Protective devices		
DC disconnect device	●	●
Ground fault monitoring / grid monitoring	● / ●	● / ●
DC reverse polarity protection / AC short-circuit current capability / galvanically isolated	● / ● / -	● / ● / -
All-pole sensitive residual-current monitoring unit	●	●
Protection class (according to IEC 62103)/overvoltage category (according to IEC 60664-1)	I / III	I / III
General data		
Dimensions (W / H / D)	470 / 730 / 240 mm (18.5 / 28.7 / 9.5 inch)	470 / 730 / 240 mm (18.5 / 28.7 / 9.5 inch)
Weight	37 kg (81.6 lb)	37 kg (81.6 lb)
Operating temperature range	-25 °C to +60 °C (-13 °F to +140 °F)	-25 °C to +60 °C (-13 °F to +140 °F)
Noise emission (typical)	40 dB(A)	40 dB(A)
Self-consumption (at night)	1 W	1 W
Topology / cooling concept	Transformerless / Opticool	Transformerless / Opticool
Degree of protection (according to IEC 60529)	IP65	IP65
Climatic category (according to IEC 60721-3-4)	4K4H	4K4H
Maximum permissible value for relative humidity (non-condensing)	100 %	100 %
Features		
DC connection / AC connection	SUNCLIX / spring-cage terminal	SUNCLIX / spring-cage terminal
Display	Graphic	Graphic
Interface: RS485, Modbus, Speedwire / Webconnect	○ / ● / ●	○ / ● / ●
Multifunction relay / Power Control Module	● / ○	● / ○
Guarantee: 5 / 10 / 15 / 20 years	● / ○ / ○ / ○	● / ○ / ○ / ○
Certificates and permits (more available on request)	AS 4777.2:2015, CE, CEI 0-21:2016, C10/11:2012, DIN EN 62109-1, EN 50438 ¹ , G59/3, G83/2, IEC 61727/MEA ² , IEC 62109-2, NEN EN 50438, NRS 097-2-1, PPC, PPDS, RD 661/2007, RD 1699:2011, SI 4777, UTE C15-712-1, VDE0126-1-1, VDE AR-N 4105, VFR 2013, VFR 2014	
Type designation	STP 5000TL-20	STP 6000TL-20

Sunny Tripower 7000TL	Sunny Tripower 8000TL	Sunny Tripower 9000TL
13500 W _p	13500 W _p	13500 W _p
1000 V	1000 V	1000 V
290 V to 800 V / 580 V	330 V to 800 V / 580 V	370 V to 800 V / 580 V
150 V / 188 V	150 V / 188 V	150 V / 188 V
15 A / 10 A	15 A / 10 A	15 A / 10 A
25 A / 15 A	25 A / 15 A	25 A / 15 A
2 / A:2; B:2	2 / A:2; B:2	2 / A:2; B:2
7000 W	8000 W	9000 W
7000 VA	8000 VA	9000 VA
3 / N / PE; 220 / 380 V	3 / N / PE; 220 / 380 V	3 / N / PE; 220 / 380 V
3 / N / PE; 230 / 400 V	3 / N / PE; 230 / 400 V	3 / N / PE; 230 / 400 V
3 / N / PE; 240 / 415 V	3 / N / PE; 240 / 415 V	3 / N / PE; 240 / 415 V
160 V to 280 V	160 V to 280 V	160 V ... 280 V
50 Hz, 60 Hz / -5 Hz to +5 Hz	50 Hz, 60 Hz / -5 Hz to +5 Hz	50 Hz, 60 Hz / -5 Hz ... +5 Hz
50 Hz / 230 V	50 Hz / 230 V	50 Hz / 230 V
10.2 A	11.6 A	13.1 A
1	1	1
0.8 overexcited to 0.8 underexcited	0.8 overexcited to 0.8 underexcited	0.8 overexcited to 0.8 underexcited
3 / 3	3 / 3	3 / 3
98 % / 97.5 %	98 % / 97.6 %	98 % / 97.6 %
		
470 / 730 / 240 mm (18.5 / 28.7 / 9.5 inch)	470 / 730 / 240 mm (18.5 / 28.7 / 9.5 inch)	470 / 730 / 240 mm (18.5 / 28.7 / 9.5 inch)
37 kg (81.6 lb)	37 kg (81.6 lb)	37 kg (81.6 lb)
-25 °C to +60 °C (-13 °F to +140 °F)	-25 °C to +60 °C (-13 °F to +140 °F)	-25 °C to +60 °C (-13 °F to +140 °F)
40 dB(A)	40 dB(A)	40 dB(A)
1 W	1 W	1 W
Transformerless / Opticool	Transformerless / Opticool	Transformerless / Opticool
IP65	IP65	IP65
4K4H	4K4H	4K4H
100 %	100 %	100 %
SUNCLIX / spring-cage terminal	SUNCLIX / spring-cage terminal	SUNCLIX / spring-cage terminal
Graphic	Graphic	Graphic
		
AS 4777.2:2015, CE, CEI 0-21:2016, C10/11:2012, DIN EN 62109-1, EN 50438 ¹ , G59/3, G83/2, IEC 61727/MEA ² , IEC 62109-2, NEN EN 50438, NRS 097-2-1, PPC, PPDS, RD 661/2007, RD 1699:2011, SI 4777, UTE C15-712-1, VDE0126-1-1, VDE AR-N 4105, VFR 2013, VFR 2014		
STP 7000TL-20	STP 8000TL-20	STP 9000TL-20

Efficiency curve

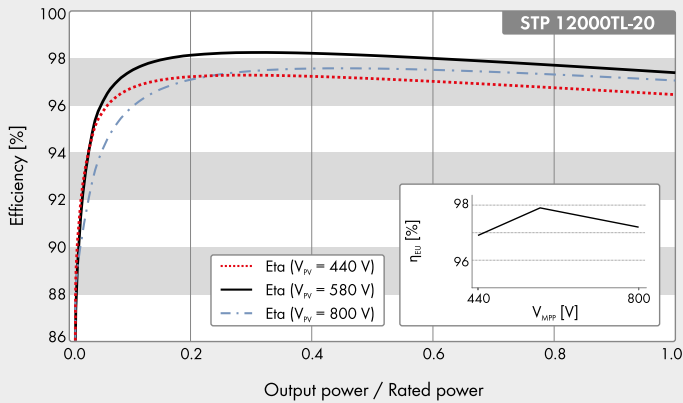

Accessories



Power Control Module
PWCBRD-10



RS485 interface
485BRD-10

¹ Does not apply to all national appendices of EN 50438

² Only STP 9000TL-20

● Standard feature ○ Optional feature – Not available

Last updated: May 2017

Data at nominal conditions

Sunny Tripower 10000TL	Sunny Tripower 12000TL	
13500 W _p	18000 W _p	
1000 V	1000 V	
370 V to 800 V / 580 V	440 V to 800 V / 580 V	
150 V / 188 V	150 V / 188 V	
18 A / 10 A	18 A / 10 A	
25 A / 15 A	25 A / 15 A	
2 / A:2; B:2	2 / A:2; B:2	
10000 W	12000 W	
10000 VA	12000 VA	
3 / N / PE; 220 / 380 V	3 / N / PE; 220 / 380 V	
3 / N / PE; 230 / 400 V	3 / N / PE; 230 / 400 V	
3 / N / PE; 240 / 415 V	3 / N / PE; 240 / 415 V	
160 V to 280 V	160 V to 280 V	
50 Hz, 60 Hz / -5 Hz to +5 Hz	50 Hz, 60 Hz / -5 Hz to +5 Hz	
50 Hz / 230 V	50 Hz / 230 V	
14.5 A	17.4 A	
1	1	
0.8 overexcited to 0.8 underexcited	0.8 overexcited to 0.8 underexcited	
3 / 3	3 / 3	
98 % / 97.6 %	98.3 % / 97.9 %	
●	●	
● / ●	● / ●	
● / ● / –	● / ● / –	
●	●	
I / III	I / III	
470 / 730 / 240 mm (18.5 / 28.7 / 9.5 inches)	470 / 730 / 240 mm (18.5 / 28.7 / 9.5 inches)	
37 kg (81.6 lb)	38 kg / 84 lbs	
-25 °C to +60 °C (-13 °F to +140 °F)	-25 °C to +60 °C (-13 °F to +140 °F)	
40 dB(A)	40 dB(A)	
1 W	1 W	
Transformerless / Opticool	Transformerless / Opticool	
IP65	IP65	
4K4H	4K4H	
100 %	100 %	
SUNCLIX / spring-cage terminal	SUNCLIX / spring-cage terminal	
Graphic	Graphic	
○ / ● / ●	○ / ● / ●	
● / ○	● / ○	
● / ○ / ○ / ○	● / ○ / ○ / ○	
AS 4777.2:2015, CE, CEI 0-21:2016, C10/11:2012, DIN EN 62109-1, EN 50438 ¹ , G59/3, G83/2, IEC 61727/MEA ² , IEC 62109-2, NEN EN 50438, NRS 097-2-1, PPC, PPDS, RD 661/2007, RD 1699:2011, SI 4777, UTE C15-712-1, VDE0126-1-1, VDE AR-N 4105, VFR 2013, VFR 2014		
STP 10000TL-20	STP 12000TL-20	

SUNNY PORTAL



www.SunnyPortal.com

Professional management,
monitoring and presentation
of PV plants

SUNNY PLACES

www.SunnyPlaces.com

The community portal for
private end customers





www.SMA-Solar.com
Status: May 2017

SUNNY TRIPOWER

15000TL / 20000TL / 25000TL



STP 15000TL-30 / STP 20000TL-30 / STP 25000TL-30



Efficient

- Maximum efficiency of 98.4%

Safe

- DC surge arrester (SPD type II) can be integrated

Flexible

- DC input voltage of up to 1000 V
- Multistring capability for optimum system design
- Optional display

Innovative

- Cutting-edge grid management functions with Integrated Plant Control
- Reactive power available 24/7 (Q on Demand 24/7)

SUNNY TRIPOWER

15000TL / 20000TL / 25000TL

The versatile specialist for large-scale commercial plants and solar power plants

The Sunny Tripower is the ideal inverter for large-scale commercial and industrial plants. Not only does it deliver extraordinary high yields with an efficiency of 98.4%, but it also offers enormous design flexibility and compatibility with many PV modules thanks to its multistring capabilities and wide input voltage range.


The future is now: the Sunny Tripower comes with cutting-edge grid management functions such as Integrated Plant Control, which allows the inverter to regulate reactive power at the point of common coupling. Separate controllers are no longer needed, lowering system costs. Another new feature—reactive power provision on demand (Q on Demand 24/7).

SUNNY TRIPOWER

15000TL / 20000TL / 25000TL

Technical Data	Sunny Tripower 15000TL
Input (DC)	
Max. generator power	27000 Wp
DC rated power	15330 W
Max. input voltage	1000 V
MPP voltage range / rated input voltage	240 V to 800 V / 600 V
Min. input voltage / start input voltage	150 V / 188 V
Max. input current input A / input B	33 A / 33 A
Number of independent MPP inputs / strings per MPP input	2 / A:3; B:3
Output (AC)	
Rated power (at 230 V, 50 Hz)	15000 W
Max. AC apparent power	15000 VA
AC nominal voltage	3 / N / PE; 220 V / 380 V 3 / N / PE; 230 V / 400 V 3 / N / PE; 240 V / 415 V
AC voltage range	180 V to 280 V
AC grid frequency / range	50 Hz / 44 Hz to 55 Hz 60 Hz / 54 Hz to 65 Hz
Rated power frequency / rated grid voltage	50 Hz / 230 V
Max. output current / rated output current	29 A / 21.7 A
Power factor at rated power / Adjustable displacement power factor	1 / 0 overexcited to 0 underexcited
THD	≤ 3%
Feed-in phases / connection phases	3 / 3
Efficiency	
Max. efficiency / European Efficiency	98.4% / 98.0%
Protective devices	
DC-side disconnection device	●
Ground fault monitoring / grid monitoring	● / ●
DC surge arrester (Type II) can be integrated	○
DC reverse polarity protection / AC short-circuit current capability / galvanically isolated	● / ● / -
All-pole sensitive residual-current monitoring unit	●
Protection class (according to IEC 62109-1) / overvoltage category (according to IEC 62109-1)	I / AC: III; DC: II
General data	
Dimensions (W / H / D)	661 / 682 / 264 mm (26.0 / 26.9 / 10.4 inch)
Weight	61 kg (134.48 lb)
Operating temperature range	-25 °C to +60 °C (-13 °F to +140 °F)
Noise emission (typical)	51 dB(A)
Self-consumption (at night)	1 W
Topology / cooling concept	Transformerless / Opticool
Degree of protection (as per IEC 60529)	IP65
Climatic category (according to IEC 60721-3-4)	4K4H
Maximum permissible value for relative humidity (non-condensing)	100%
Features / function / Accessories	
DC connection / AC connection	SUNCLIX / spring-cage terminal
Display	○
Interface: RS485, Speedwire / Webconnect	○ / ●
Data interface: SMA Modbus / SunSpec Modbus	● / ●
Multifunction relay / Power Control Module	○ / ○
OptiTrac Global Peak / Integrated Plant Control / Q on Demand 24/7	● / ● / ●
Off-Grid capable / SMA Fuel Save Controller compatible	● / ●
Guarantee: 5 / 10 / 15 / 20 years	● / ○ / ○ / ○
Planned certificates and permits	ANRE 30, AS 4777, BDEW 2008, C10/11:2012, CE, CEI 0-16, CEI 0-21, DEWA 2.0, EN 50438:2013*, G59/3, IEC 60068-2-x, IEC 61727, IEC 62109-1/2, IEC 62116, MEA 2013, NBR 16149, NEN EN 50438, NRS 097-2-1, PEA 2013, PPC, RD 1699/413, RD 661/2007, Res. n°7:2013, SI4777, TOR DA, TR 3.2.2, UTE C15-712-1, VDE 0126-1-1, VDE-AR-N 4105, VFR 2014
* Does not apply to all national appendices of EN 50438	
Type designation	STP 15000TL-30

Efficiency Curve

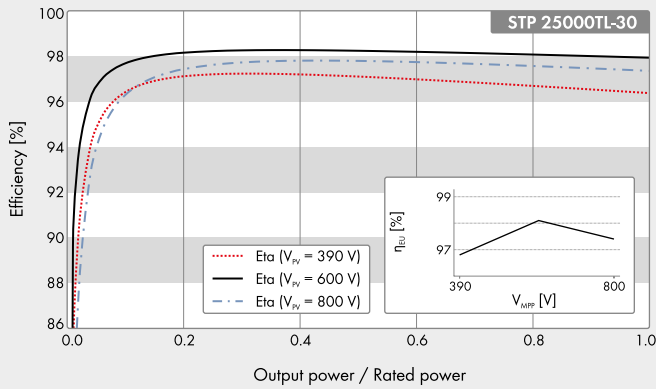

Accessory



RS485 interface
DM-485CB-10



Power Control Module
PWCMOD-10



DC surge arrester Typ II,
inputs A and B
DCSPD KIT3-10



Multifunction relay
MFR01-10

● Standard features ○ Optional features – Not available
 Data at nominal conditions
 Status: October 2017

Technical Data

Input (DC)

Max. generator power
DC rated power
Max. input voltage
MPP voltage range / rated input voltage
Min. input voltage / start input voltage
Max. input current input A / input B
Number of independent MPP inputs / strings per MPP input

Output (AC)

Rated power (at 230 V, 50 Hz)
Max. AC apparent power
AC nominal voltage
AC voltage range
AC grid frequency / range
Rated power frequency / rated grid voltage
Max. output current / Rated output current
Power factor at rated power / Adjustable displacement power factor
THD
Feed-in phases / connection phases

Efficiency

Max. efficiency / European Efficiency

Protective devices

DC-side disconnection device
Ground fault monitoring / grid monitoring
DC surge arrester (Type II) can be integrated
DC reverse polarity protection / AC short-circuit current capability / galvanically isolated
All-pole sensitive residual-current monitoring unit
Protection class (according to IEC 62109-1) / overvoltage category (according to IEC 62109-1)

General data

Dimensions (W / H / D)
Weight
Operating temperature range
Noise emission (typical)
Self-consumption (at night)
Topology / cooling concept
Degree of protection (as per IEC 60529)
Climatic category (according to IEC 60721-3-4)
Maximum permissible value for relative humidity (non-condensing)

Features / function / Accessories

DC connection / AC connection
Display
Interface: RS485, Speedwire/Webconnect
Data interface: SMA Modbus / SunSpec Modbus
Multifunction relay / Power Control Module
OptiTrac Global Peak / Integrated Plant Control / Q on Demand 24/7
Off-Grid capable / SMA Fuel Save Controller compatible
Guarantee: 5 / 10 / 15 / 20 years
Certificates and permits (more available on request)

* Does not apply to all national appendices of EN 50438

Type designation

Sunny Tripower 20000TL

Sunny Tripower 25000TL

36000 W _p	45000 W _p
20440 W	25550 W
1000 V	1000 V
320 V to 800 V / 600 V	390 V to 800 V / 600 V
150 V / 188 V	150 V / 188 V
33 A / 33 A	33 A / 33 A
2 / A:3; B:3	2 / A:3; B:3
20000 W	25000 W
20000 VA	25000 VA
3 / N / PE; 220 V / 380 V	
3 / N / PE; 230 V / 400 V	
3 / N / PE; 240 V / 415 V	
180 V to 280 V	
50 Hz / 44 Hz to 55 Hz	
60 Hz / 54 Hz to 65 Hz	
50 Hz / 230 V	
29 A / 29 A	36.2 A / 36.2 A
1 / 0 overexcited to 0 underexcited	
≤ 3%	
3 / 3	
98.4% / 98.0%	98.3% / 98.1%

●
● / ●
○
● / ● / -
●
I / AC: III; DC: II

661 / 682 / 264 mm (26.0 / 26.9 / 10.4 inch)
61 kg (134.48 lb)
-25 °C to +60 °C (-13 °F to +140 °F)
51 dB(A)
1 W
Transformerless / Opticool
IP65
4K4H
100%

SUNCLIX / spring-cage terminal

○
○ / ●
● / ●
○ / ○
● / ● / ●
● / ●
● / ○ / ○ / ○

ANRE 30, AS 4777, BDEW 2008, C10/11:2012, CE, CEI 0-16, CEI 0-21, DEWA 2.0, EN 50438:2013*, G59/3, IEC 60068-2-x, IEC 61727, IEC 62109-1/2, IEC 62116, MEA 2013, NBR 16149, NEN EN 50438, NRS 097-2-1, PEA 2013, PPC, RD 1699/413, RD 661/2007, Res. n°7:2013, SI4777, TOR DA, TR 3.2.2, UTE C15-712-1, VDE 0126-1-1, VDE-AR-N 4105, VFR 2014

STP 20000TL-30

STP 25000TL-30

www.SunnyPortal.com

Professional PV system monitoring, management and data display



www.SMA-Solar.com

SMA Solar Technology